



COMMERCIAL
CONTROL
VALVES

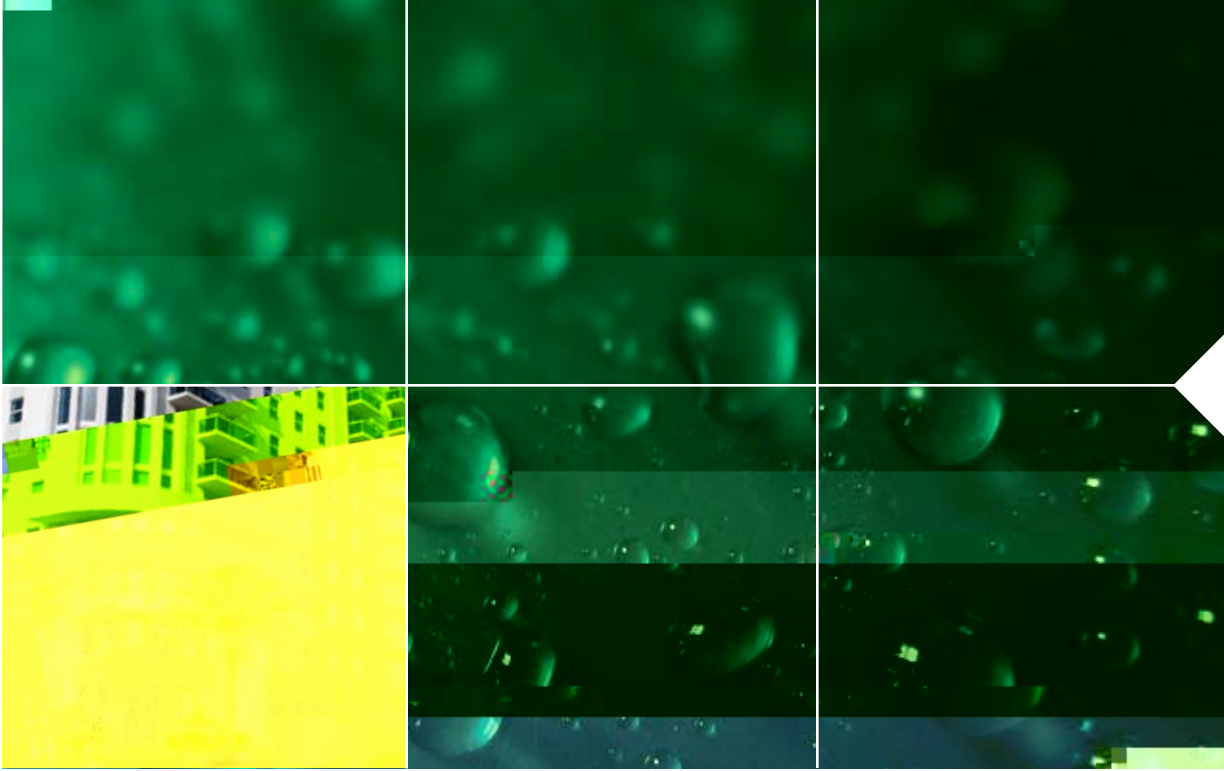

Magnum® Control Valve

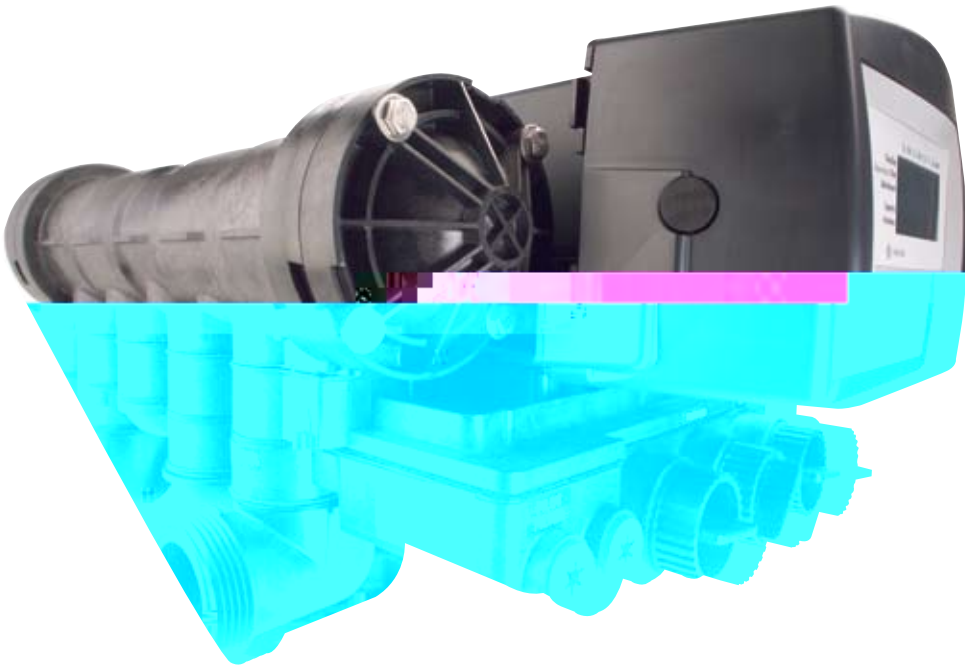

Magnum® Control Valve

C

The Pentair Water Magnum Control Valve is one of the most versatile valves on the market.

L

- All-electronic control platform
- 24-hour super-capacitor backup – no battery necessary
- Remote mount kit allows programming module to be installed up to 40 feet away
- Universal controller – works on all Autotrol® brand valves
- Automatic capacity calculations – no math or salt tables necessary
- 12-volt operation

The Logix series offers the ultimate in control for the Magnum valve. Simple 3-step programming and installation makes this electronic controller the industry leader.



742 C

- Simple, economic electronic time clock (chronometric)
- 7- or 99-day regeneration settings
- Filter or conditioner setting in one control
- Fully programmable cycle times
- Salt setting in 1-pound increments (lbs/cu ft)
- Single controller operates Autotrol 255, 263, 268, 278 models, and Pentair Water Magnum and Magnum IT with one controller

762 D

- Simple, economic electronic demand (volumetric)
- Calendar override – 99 day
- 28-day variable reserve
- Filter or conditioner setting in one controller
- Automatic capacity calculations
- Fully programmable cycle times
- Salt setting in 1-pound increments (lbs/cu ft)
- Operates 255, 263, 268, 278, and Magnum IT with one controller

764 D

Same features as the 762, plus:

- Multi-tank applications (twin alternating, multi-tank parallel)
- Control lockout
- Remote regeneration



F ()

Service @ 15 psi (1.03 bar) drop	76 gpm (17.3 m ³ /hr)
Backwash @ 25 psi (1.72 bar) drop	89 gpm (20.2 m ³ /hr)
Service	Cv = 19.5 (Kv = 17)
Backwash	Cv = 17.8 (Kv = 19.9)

C /D

Tank Thread	4-inch 8 UN
Inlet/Outlet	2-inch: connections NPT or BSPT, Female, CPVC
Brine Line	3/4-inch NPT
Drain Line*	1-1/2-inch: connections for NPT or BSPT, Female, CPVC
Riser Tube Diameter	1-1/2-inch
Riser Installation	Above top of tank 5/8-inch (±1/8-inch)
Pilot Drain and Auxiliary Hydraulic Output	1/4-inch tube fitting

*Valve installed drain flow controls available (5 – 40 gpm). If higher backwash flow is needed, an external flow control will be required.





D /




Valve Body	Thermoplastic
O-rings	EPDM
Injector	7 sizes available: 14, 16, 18, 21, 24, 30, 36
Working Pressure	25 psi – 100 psi (1.72 bar – 6.9 bar)
Water Temperature	35° – 100°F (2° – 38°C), 120°F (49°C) Ambient

Top Mount or Side Mount Configuration

Magnum® Control Valve

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

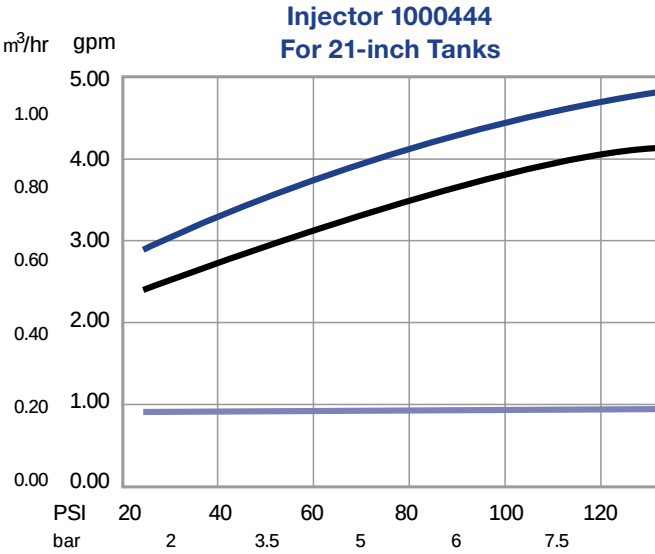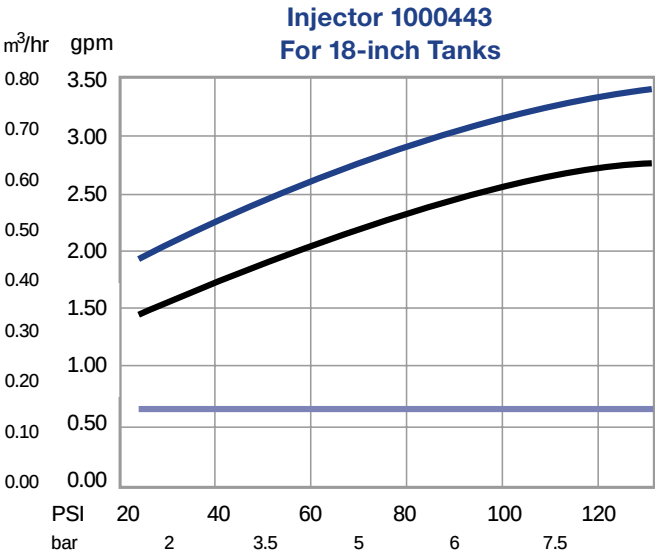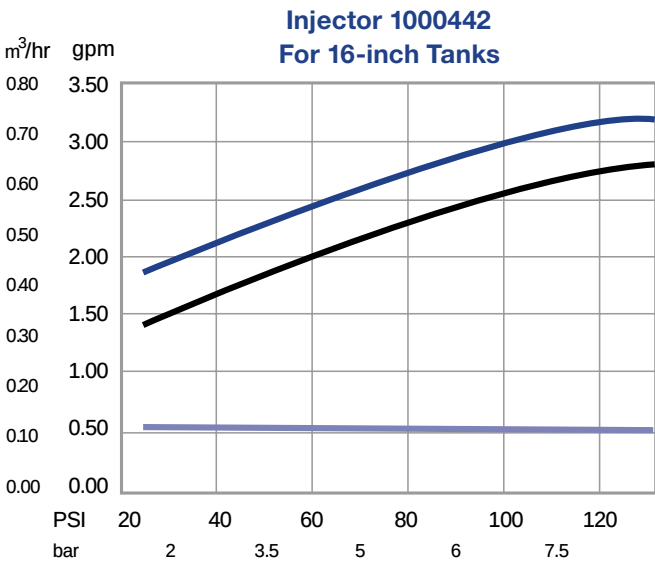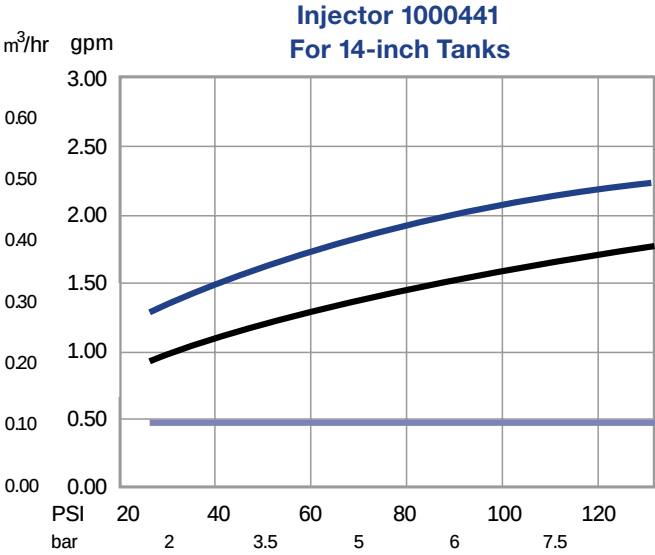

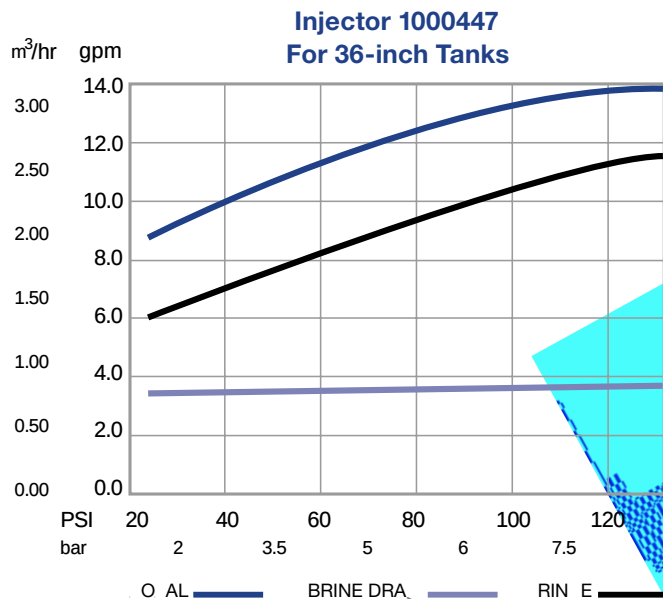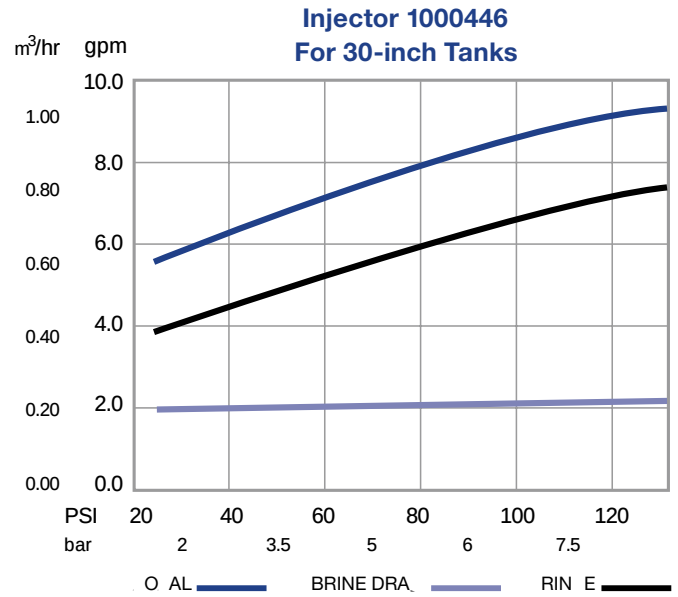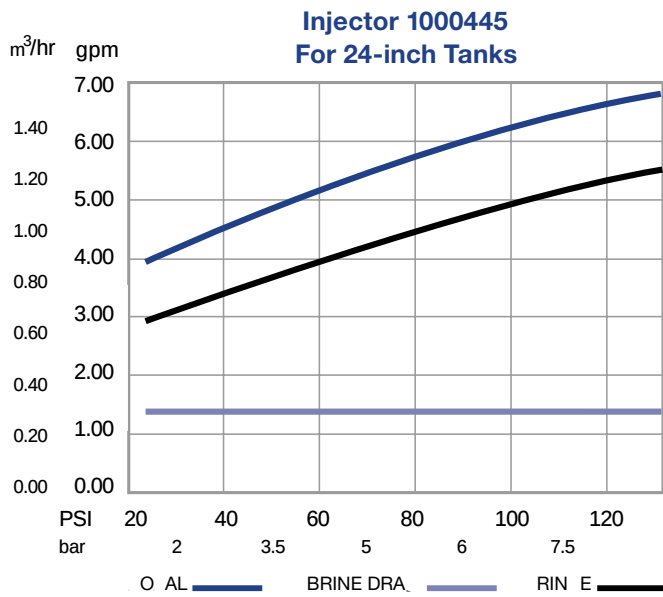


NOTE: Brine draw and rinse rates on empty tank.

1-1/2-

N




C

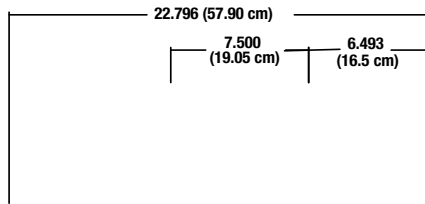

2-

N

I

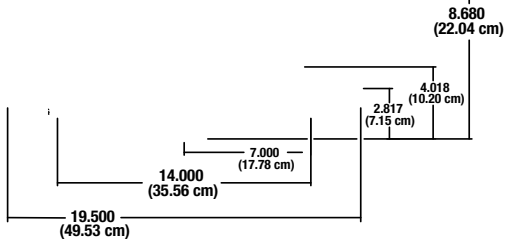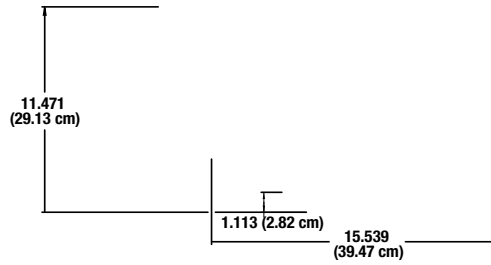



20580 Enterprise Avenue
Brookfield, WI 53045
Tel: 262.784.4490
Fax: 262.784.7794

5730 North Glen Park Road
Milwaukee, WI 53209
Tel: 262.238.4400
Fax: 262.238.4402

©2010 Pentair Residential Filtration, LLC
1017972 Rev F FE10

Customer Care: 800.279.9404 www.pentairwatertreatment.com